



Balanced source on
"Balanced Input 1"

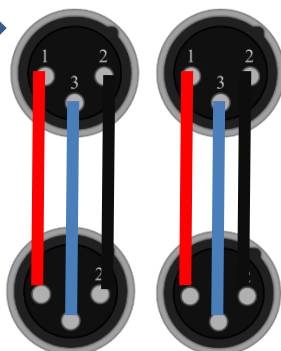

Unbalanced source on
"Balanced Input 2"

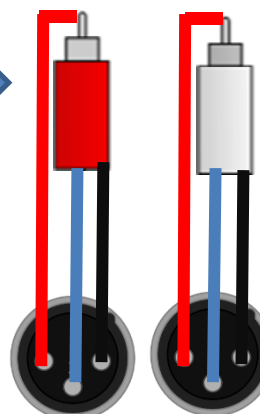

Connect the Ground-Pin on the Input to the Chassis. Connect the chassis also to a ground pin (Pin 3/7/8) on both amplifiers.

The rotary switch will switch "+" and "-".

230V Input:
PE-Conductor will
be connected to
chassis



Left Right

Left Right

4 Pole 2 Position Rotary Switch: ELMA01-1424

Left

Right

