




Notes:

cone: treated silk dome
front: ABS
voice coil: NSV
magnet: neodym N 35

Frequenzgang / frequency response

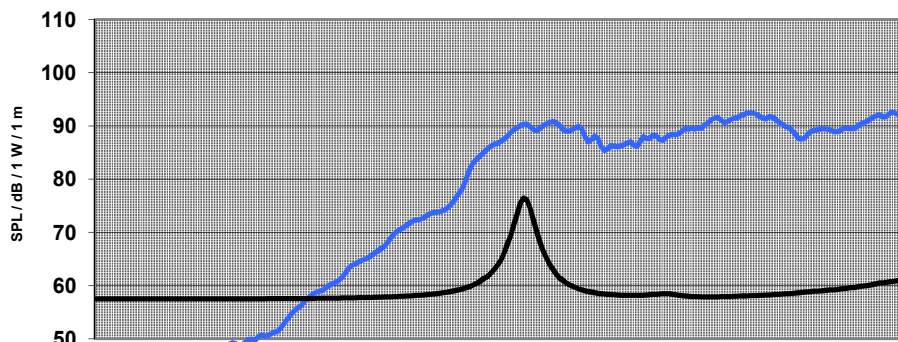


Terminals:

"+" 4.8 x 0.8 mm
"-" 2.8 x 0.8 mm

Technical data (EN):

nom impedance 8 Ω
nom. power 20 watts*
peak SPL 93 dB
sensitivity 91 dB
average SPL 89 dB
res. frequency 760 Hz
freq. Range (-10 dB):
480 to 20000 Hz
Xmax +/- 0,8 mm
total weight 0,083 kg
voice coil $\varnothing$ 25 mm
*power with 2,2 mF/100 V

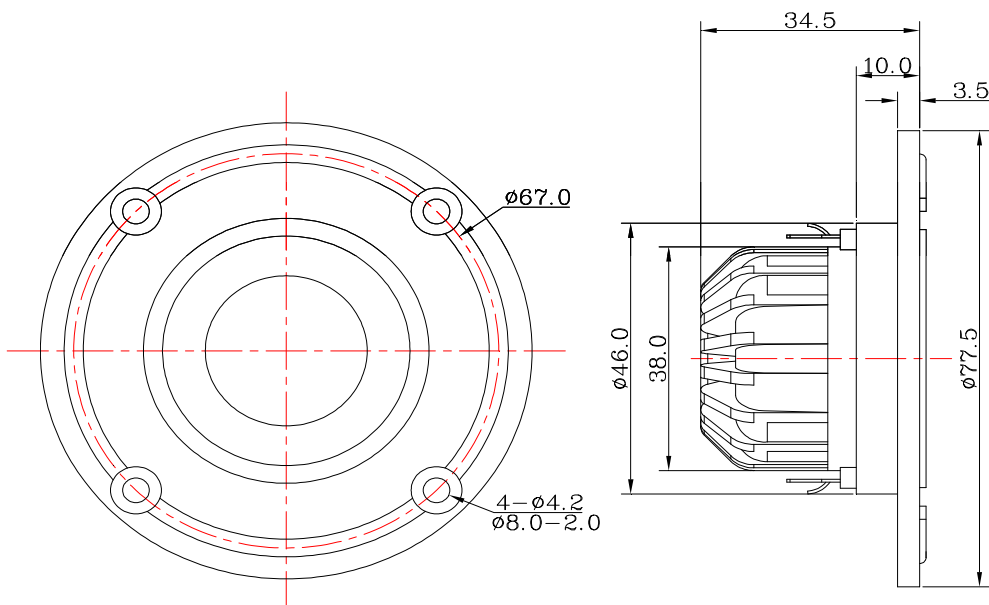

Thiele / Small parameter:

Re 7,1 Ω
Qms 3,98
Qes 1,71
Qts 1,2

Remarks:

heat test: 70 ° 16 hours
cold test: -25 ° 16 hours
humidity & heat test: 40 ° 96 hours

Technical data are measured with ATB - equipment according EN - 60268 - 5

For product improvement HKM reserves alterations in specifications and design without further announcement

For tolerances of technical data refer to HKM's manual of technical data

For information contact: tel.: +49 (0) 9073 / 9585 - 0, fax.: +49 (0) 9073 / 9585 - 55, e-mail: info@hkm-group.de

HP.: www.hkm-group.de

15.06.2016